

# terneo pro

простое управление теплом



\_\_\_\_\_

Ø 16 )

70 %.

\_\_\_\_\_

/		
1		+5...+90 °
2		16
3		3 000
4		220 ±10 %
5		0,18 кг ±10 %
6		60 × 60 × 33 мм
7		10 25 °
8		3
9	- -	50 000
10	- -	100 000
11		1 °
12	14254	IP20


\_\_\_\_\_

\_\_\_\_\_

6 7.

1 2, (220 ±10%, 50 )  
 1, (L) — 2.  
 3 4 (N) — )

2

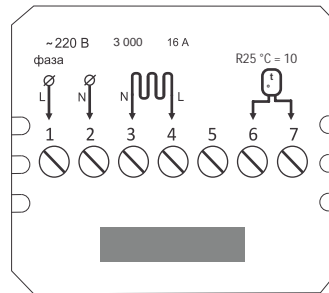

1.

\_\_\_\_\_

-5...+45°

0,4 1,7

( )


16

2

65

2,5

3

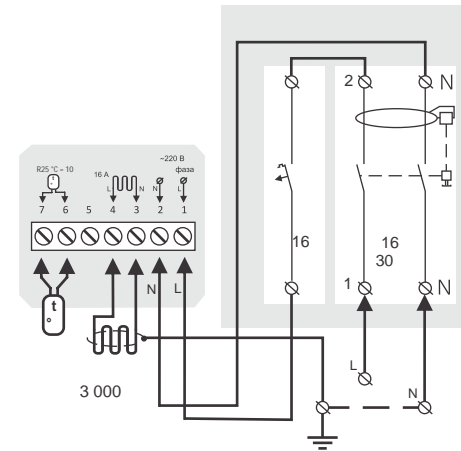

2.

3

0,5 ×

( )

2.


50

Ø16 )


5

( 20 )


4

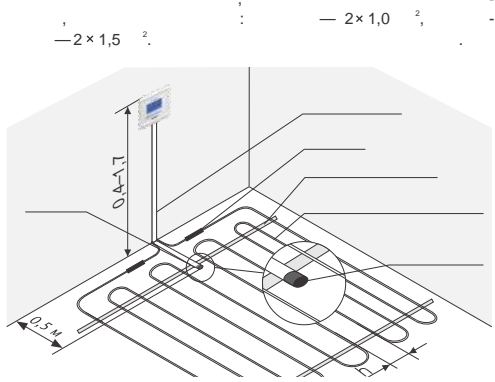

1.

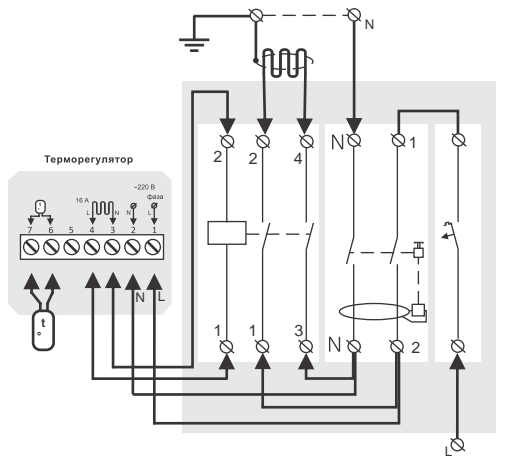


3.



2.

5

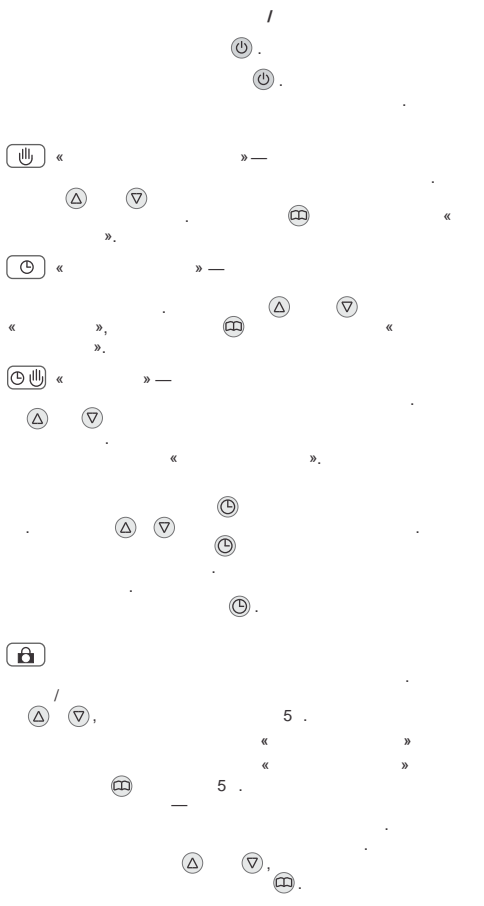


6

	☀	06:00	20 °
	🏠	08:00	15 °
	📧	11:30	15 °
	🏠	12:30	15 °
	🏠	17:00	22 °
	🌙	22:00	15 °
	☀	08:00	22 °
	🌙	23:00	15 °

«OFF»

5 °

TRDJ		±6,0 °
25EN		in OFF ALL
3H	Max.	(ALL) 99 °
4L	Min.	(ALL) 4 °
5RDR	30	OFF ON
6PRG		-5/ -2 -6/ -1 -7/ -0

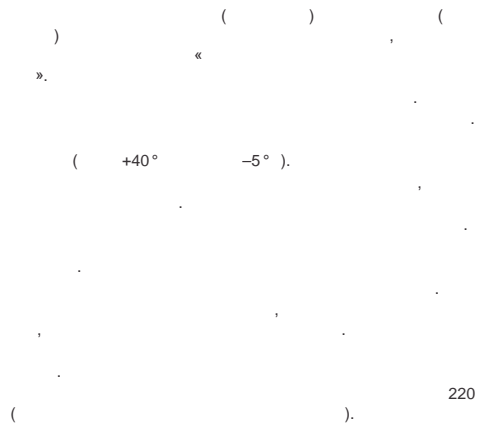

7

33.2-3024603335-001-2003.

1. 24
2. 14
3. 14
4. 14
5. 14
6. 14

220